# Quick Guide to Using the Nokia 7110 with Windows NT 4.0 RAS

## 1. Installing and setting up

Proceed as follows:

**1.** Install the Nokia 7110 modem driver in Windows NT 4.0

**2.** Open the Control Panel.

**3.** Open Network.

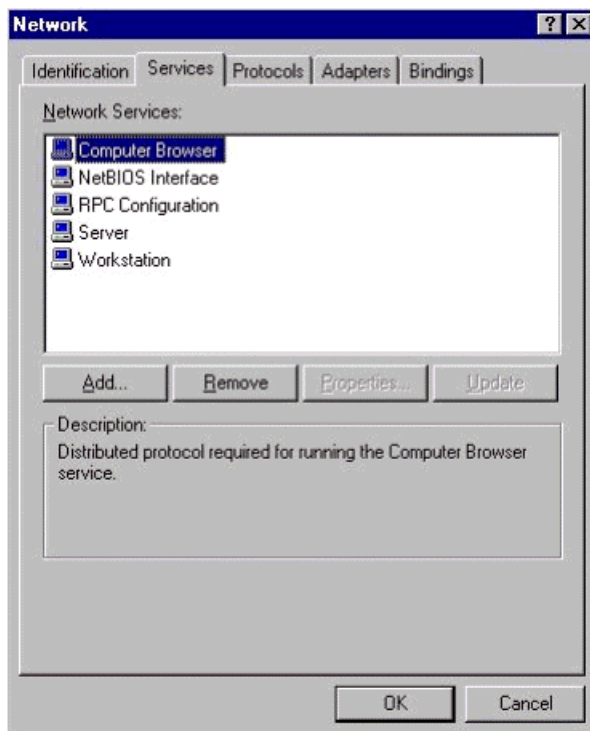**4.** Click the Services tab (Figure 1).



*Figure 1. Network Services.*

**5.** Click Add..

**6.** Select "Remote Access Service", click OK (Figure 2).
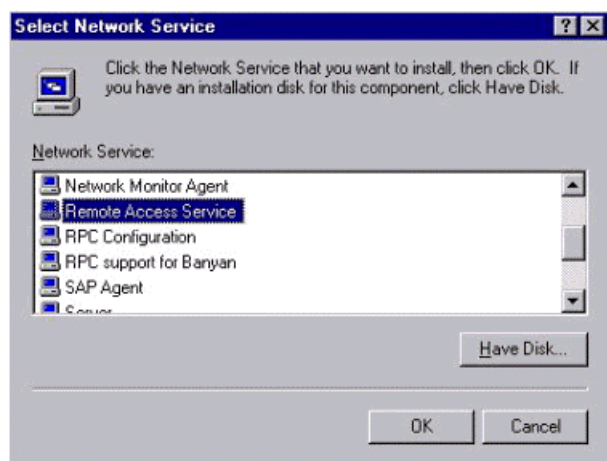
*Figure 2. Adding Remote Access Service.*

**7.** You should now see the 'Add RAS Device' window with the RAS Capable Device: COM2 - Nokia 7110 Cable, click OK (Figure 3.)
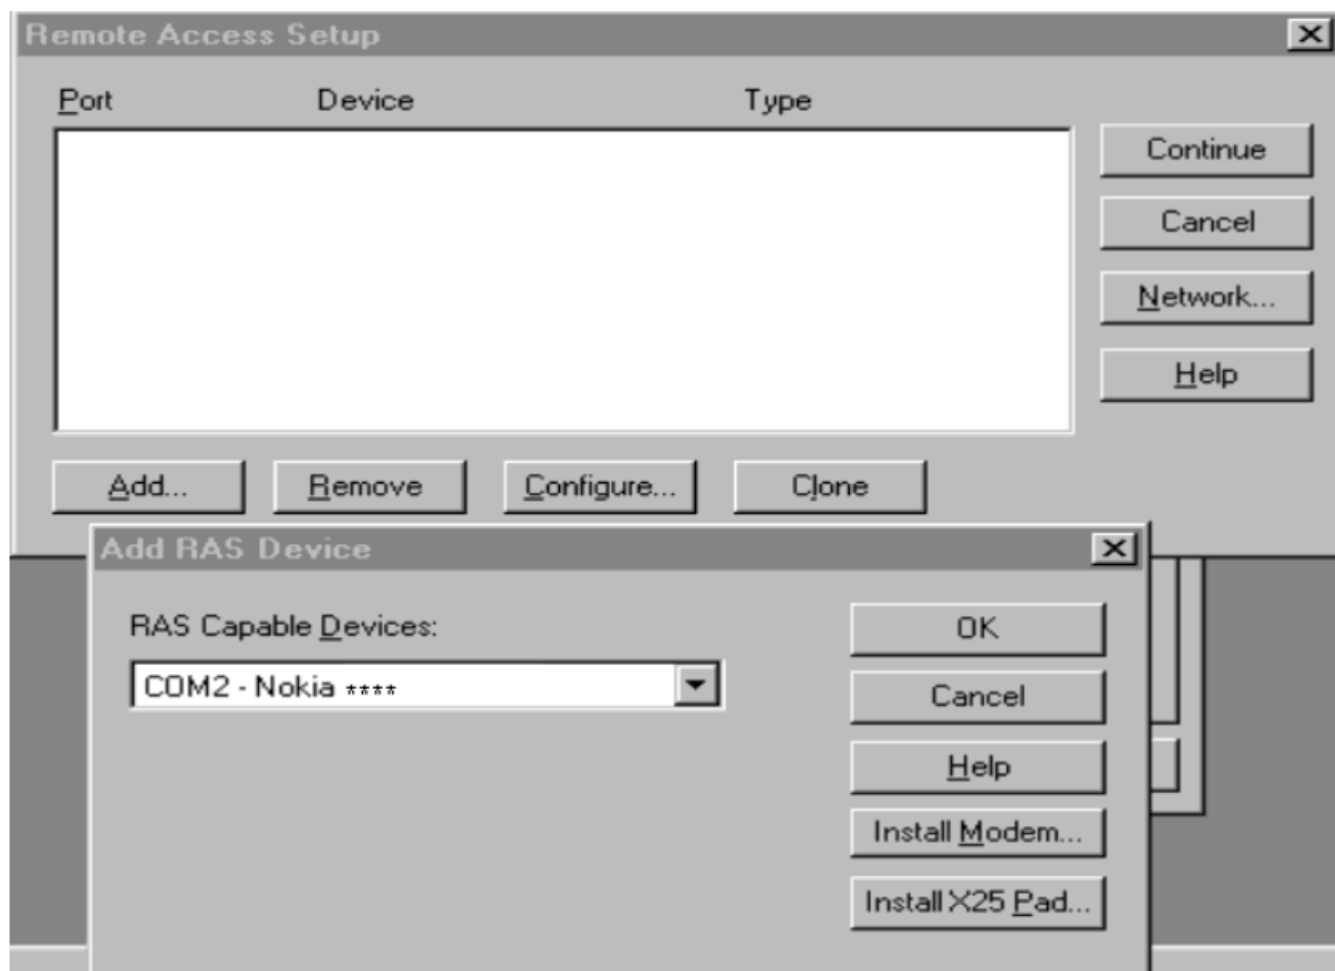


*Figure 3. Add RAS Device.*

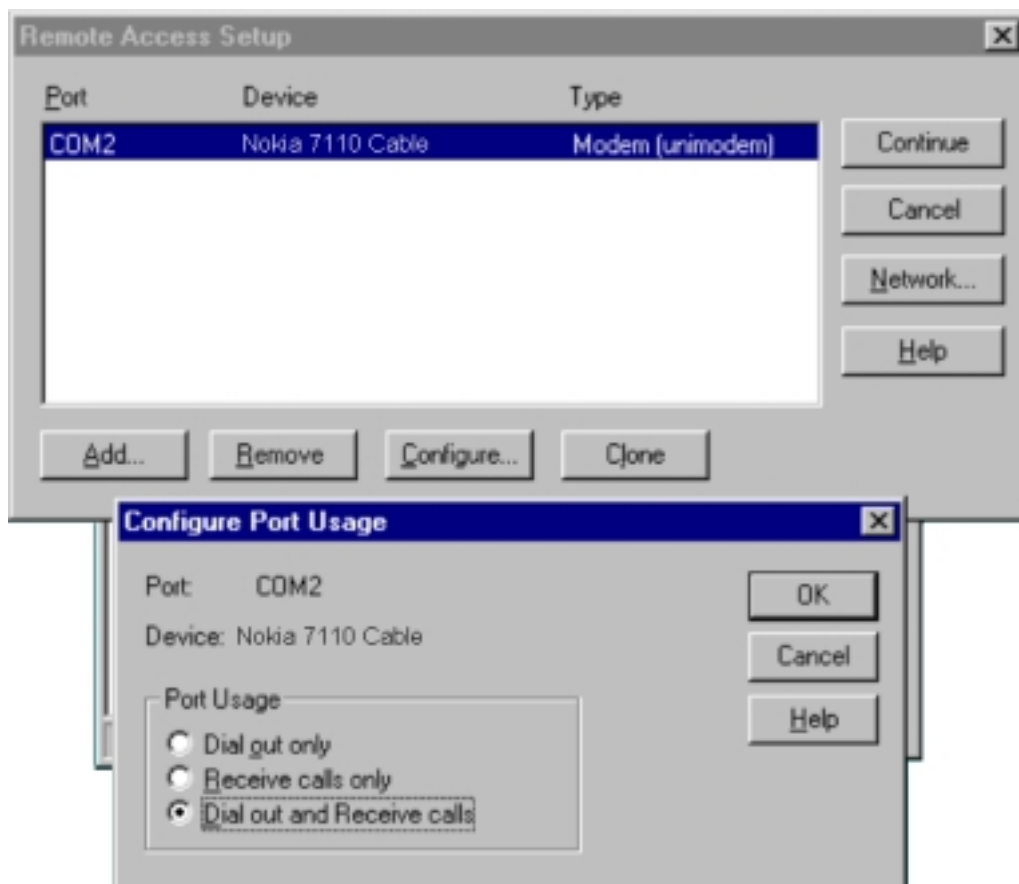**8.** You can now configure port usage (Figure 4).

*Figure 4. Configure Port Usage.*

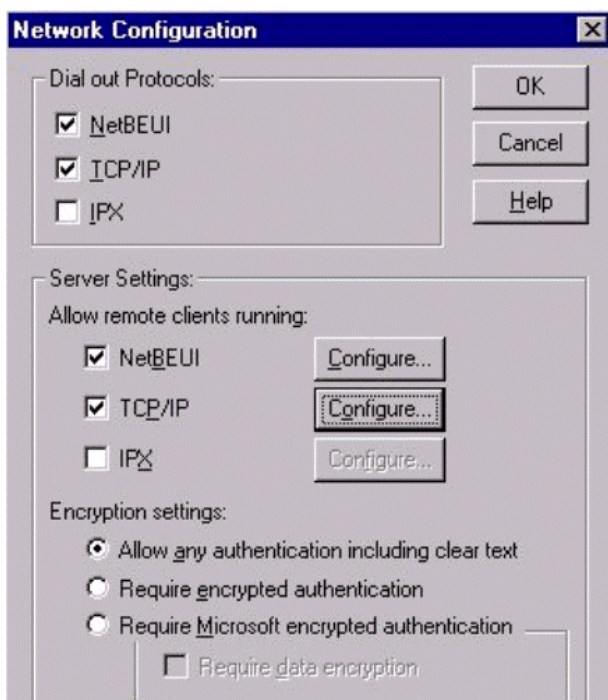**9.** You can now set up the Network Configurations (Figure 5).



*Figure 5. Network Configuration.*

**NOKIA**

**10.** Your Remote Access Service has now been successfully installed. Use Remote Access Admin or User Manager in the Administrative Tools folder to assign Remote Access permission to users.

**11.** Reboot your computer now.

**NOKIA**

## 1.1  Making a connection

**12.** Open the Control Panel, Open Services.
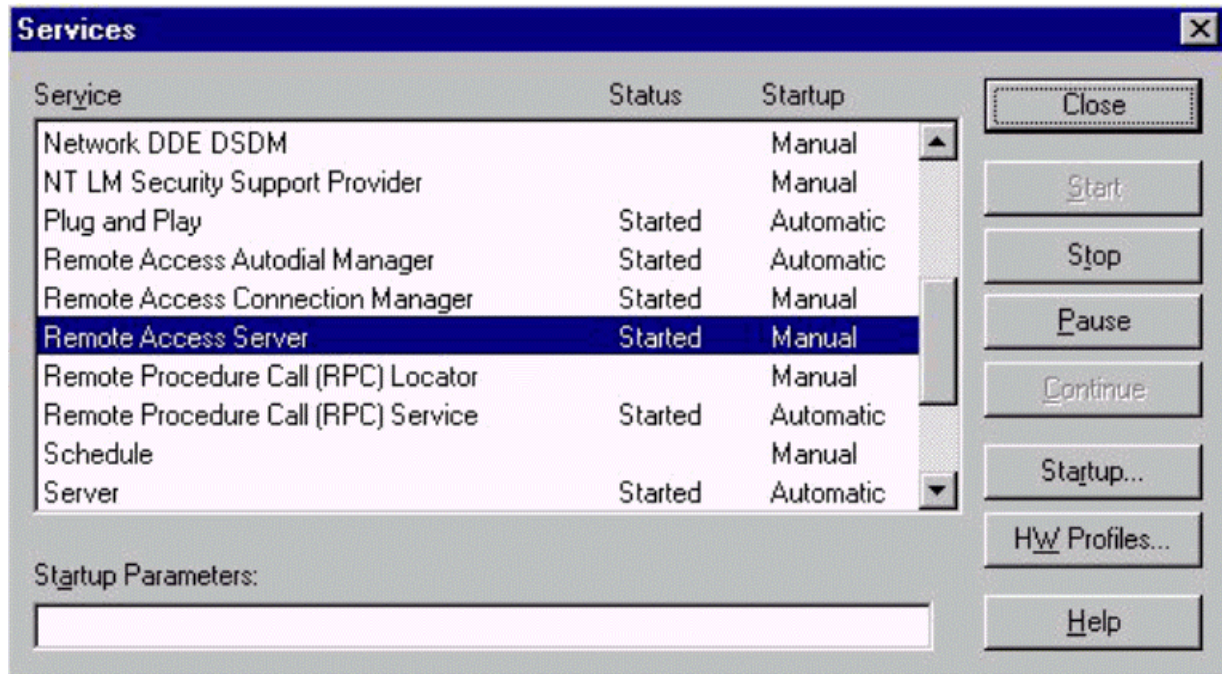**13.** Start the Remote Access Server (Figure 6).



*Figure 6. Start Remote Access Service.*

You can now start Remote Access Admin so that you can monitor the Remote Access connection. Click Start, click Programs, click Administrative Tools, click Remote Access Admin (Figure 7.)
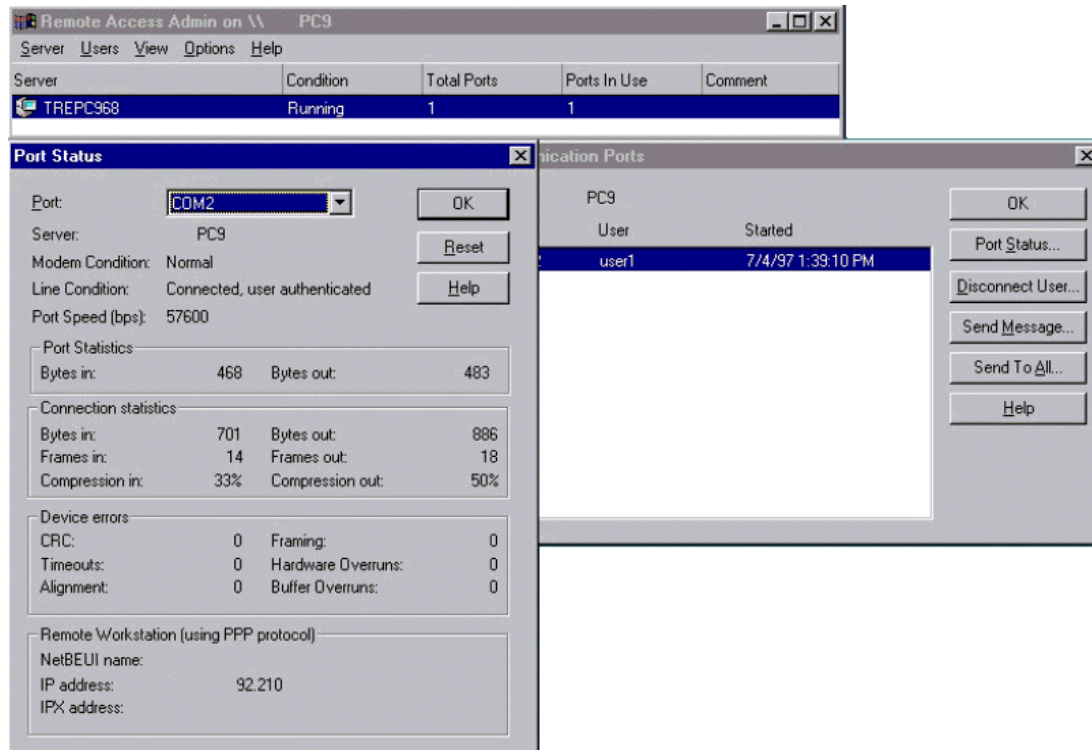


*Figure 7. Remote Access Admin Port Status.*

**NOKIA**